

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G

M: 00 91 9810 291 381, 8800 544 881



Lock Tag!!

to compliance
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited

GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: u31903HR2011PTC042508

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

SPECIAL FEATURE of OSHA Safety Lock Tag Padlock :

- High quality isolation lock as per isolation guidelines to meet OSHA requirement
- Key retained in unlock condition that means key would not come out .
- Key can be removed in only lock position.
- It is suitable for both low and high temperature.
- Particular key for particular lock.
- No key mixing with any other lock.
- Key mechanism- differ key , alike key , master key available on demand. The new management key technology – 6/10 level management.
- Each lock with specific numbering on body of lock and key.
- Special fluorescent color available on volume basis.
- Standard shackle, long shackle – Metal/ Dielectric shackle available
- Electric current resist from shackle to key, in case of dielectric shackle .
- Main advantage of nylon shackle , in case of emergency, shackle can be cut easily .

GSTIN No.: 06AAPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G

M: 00 91 9810 291 381, 8800 544 881



to compliance
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: u31903HR2011PTC042508

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA


www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

DOUBLE BODY – OSHA SAFETY LOCK TAG PADLOCK – METAL SHACKLE

- Padlock Is a detachable Lock Passed By An Opening With U-shaped Shackle Used To Protect Against Unauthorized Or Unwanted Stealing. Provided With Latest Locking Mechanism Used To Lock The Different Devices.
- KRM LOTO SAFETY PADLOCK ---"seamless" lock structure durability-Key system: DIFFER KEY, ALIKE KEY, MASTER & DIFFER KEY. The new management key technology,- 10 level management.
- With a curve at top to hold the lock with better grip
- Key Head in injection mold with same color of the lock.
- High Quality with waterproof, corrosion resistant and strong adhesive. Side of the design
- Key retaining-ensures that padlock is not left unlocked.
- Configuration key card, easy to know personal ID, indicating the corresponding padlock for easy management.
- Key system: DIFFER KEY, ALIKE KEY, MASTER & DIFFER KEY.
- Body material: Glass fiber reinforced nylon/(composition of ABS+NYLON)
- Shackle Material: Nylon Color: Red, Yellow, Blue, Green, Orange, White, Brown, Black, Purple
- Work temperature 0o - 250o F (-20o--120o C)
- Also "DO NOT REMOVE", permanently engraved on the lock.



KRM-K-DB-OSLTP-MSDK

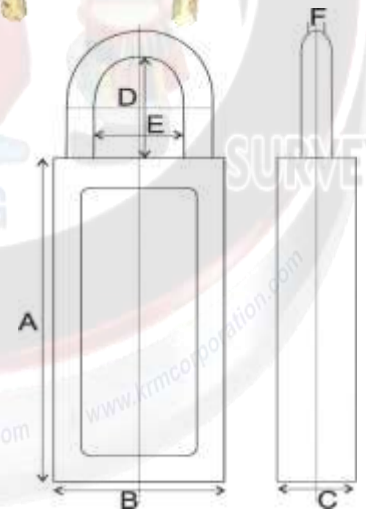

BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACLE WIDTH (E)	SHACKLE THICKNESS (F)
75 mm	38 mm	20 mm	38 mm	20 mm	6 mm

GSTIN No.: 06AAVPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G

M: 00 91 9810 291 381, 8800 544 881



to compliance
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: u31903HR2011PTC042508

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA


www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

DOUBLE BODY – OSHA SAFETY LOCK TAG PADLOCK – METAL LONG SHACKLE

- Padlock Is a detachable Lock Passed By An Opening With U-shaped Shackle Used To Protect Against Unauthorized Or Unwanted Stealing. Provided With Latest Locking Mechanism Used To Lock The Different Devices.
- KRM LOTO SAFETY PADLOCK ---"seamless" lock structure durability-Key system: DIFFER KEY, ALIKE KEY, MASTER & DIFFER KEY. The new management key technology,- 10 level management.
- With a curve at top to hold the lock with better grip
- Key Head in injection mold with same color of the lock.
- High Quality with waterproof, corrosion resistant and strong adhesive. Side of the design
- Key retaining-ensures that padlock is not left unlocked.
- Configuration key card, easy to know personal ID, indicating the corresponding padlock for easy management.
- Key system: DIFFER KEY, ALIKE KEY, MASTER & DIFFER KEY.
- Body material: Glass fiber reinforced nylon/(composition of ABS+NYLON)
- Shackle Material: Nylon Color: Red, Yellow, Blue, Green, Orange, White, Brown, Black, Purple
- Work temperature 0o - 250o F (-20o--120o C)
- Also "DO NOT REMOVE", permanently engraved on the lock.



KRM-K-DB-OSLTP-MLDK

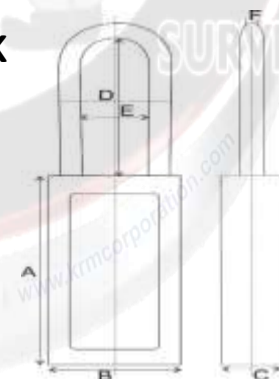

BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACLE WIDTH (E)	SHACKLE THICKNESS (F)
75 mm	38 mm	20 mm	76 mm	20 mm	6 mm