



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com



KRM LOTO – ROUND MULTIPURPOSE CABLE LOCKOUT (6+8 HOLES)

- **Material** - ABS or Polypropylene and metal part made of standard steel finish with external threading.
- Bolt molded in the base part of polypropylene device having holes and upper part of polypropylene having internal threading for the upper screw.
- KRM LOTO Round Multipurpose Cable Lockout with knob grip for rotation used to the installed devices for safety purposes that is made with two parts, upper part having 6 holes and lower part having 8 holes.
- Metallic Bolt inbuilt is anti rust coated.
- **Cable length** - 1.5 meter, 2 meter, 3 meter, 5 meter, 10 meter, 20 meter. Standard cable thickness is 4 mm, 5 mm available on request at additional cost.
- Can be utilized to lock ball valve, gate valve and other electrical equipment that is used for Electrical or mechanical group isolation.
- **Weight** - 40gms for the body and 70gms for 2 mtr of cable.
- **Color** - Red, Yellow, Green and Blue.



KRM-K-RMCLT-6-R
 (WITHOUT CABLE)




KRM-K-RMCLT-6C
 (2 MTR CABLE WITHOUT LOOP)



KRM-K-RMCLT-6CL
 (2 MTR CABLE WITH LOOP)

KRM-K-RMCLT-6
 with 6 holes on the top &
 8 Holes on the Bottom

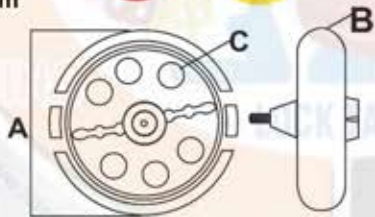

MODELS	A	B	C	NO OF HOLES	WEIGHT
KRM-K-RMCLT-6/6H	40 mm	15 mm	7.5 mm	6	40 gms
KRM-K-RMCLT-6C	40 mm	15 mm	7.5 mm	6	110 gms
KRM-K-RMCLT-6CL	40 mm	15 mm	7.5 mm	6	115 gms