



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269




www.lotoappliances.com



KRM LOTO NON CONDUCTIVE HASP WITH 4 HOLES SHACKLE THICKNESS 3MM

- KRM Di-electric slider Hasp's body is in three parts made of strong rigid plastic having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally four holes to placed padlocks for standardized isolation.
- **Material** – ABS/Nylon
- **Dimension** – height 65 mm, width 62 mm (Top and Bottom), shackle thickness is 3mm for thick and thin shackle width 55 mm.
- **Weight** – 30 gm for thin shackle with 4 holes
- **Color** – Yellow body with black shackle, Yellow body with black & red shackle Or any color make as per the required quantity

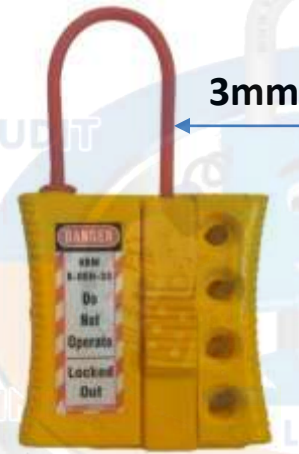

KRM-K-DEH-33



ITEM CODE	HEIGHT	SHACKLE THICKNESS	PADLOCK HOLE DIA	NO OF HOLES	WEIGHT
KRM-K-DEH-33	65 mm	03 mm	7.5mm	04	30 gm