



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147 & 1910.269




www.lotoappliances.com



KRM LOTO – COMBINATION SAFETY PADLOCK

- Combination Padlock is a combination of metal body with a stainless steel cover.
- Standard Size of a Padlock – 50mm or 45mm
- Three digit combinations for locking
- Iron housing, galvanized, chrome plated and zinc alloy wheels with spray paint.
- **Shackle Material** – Zinc alloy
- **Body Material** – Zink alloy
- **Weight:** 120gm
- **Color** – Different color dial plates are available

Remark: The password is fixed and unchangeable (password is in the inside package , back of the padlock)

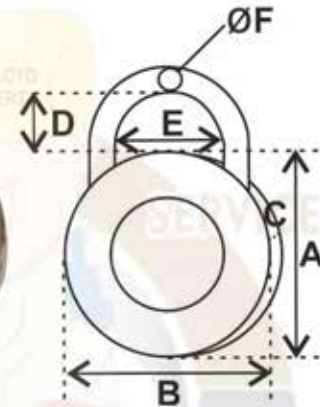

KRM-K-CSP



Take out the password paper.



Turn the wheel to the corresponding password.



Unlock.

BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
50 mm	50mm	22 mm	20 mm	23mm	7 mm