



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com



Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com


# KRM LOTO - LOCK TAG PADLOCK METAL SHACKLE- ECONOMY RANGE-5 LEVEL

- A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing. Provided with LOCKING MECHANISM used to lock the different devices.
- PADLOCK----Molded lock structure durability - key system: DIFFER KEY , ALIKE KEY OPTION
- key System - 5 level management. **Max Combination differ key -400 nos. and repeat after that .**
- Key retaining feature in unlocked. Position .
- Configuration key card label as well as lock label , easy to know personal ID indicating the corresponding padlock for easy management.
- **Body Material** - Engineering material ABS
- **Shackle Material** - Heavy Coated Metal steel.
- Key : Brass with SS finish – 2 key each lock as standard, but in alike key one lock one key
- **Cylinder Pin** : normal internal Pin
- **Color** - Red, Blue, Green, Yellow, Black .
- **Weight** – 80gm ( +-10%)
- **STANDARD ENGRAVED ALPHABETS WITH NUMRICAL NUMBER ON LOCK BODY & KEY HEAD.**



**KRM-K-LSPL-MK-EN5**

**KRM-K-LSPL-MKA-EN5**

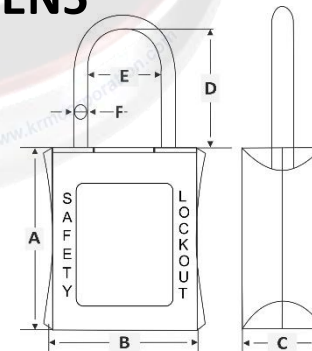

BODY HEIGHT(A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
45 mm	42 mm	20 mm	40 mm	20 mm	6 mm