



OEM Manufacturer & Global Supplier of  
 Lockout Tagout & Safety Products

to meet  
 OSHA'S Lockout Tagout Standard  
 29 CFR, 1910.147&1910.269



GSTIN No.: 06AAECK2831L1Z1  
 PAN No.: AAECK2831L  
 TIN No.: 06824000112  
 CIN No.: U31903HR2011PTC042508  
 IEC: AAECK2831L


Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

# OSHA SAFETY LOCK TAG PADLOCK – NYLON SHACKLE

- Padlock Is a detachable Lock Passed By An Opening With U-shaped Shackle Used To Protect Against Unauthorized Or Unwanted Stealing. Provided With Latest Locking Mechanism Used To Lock The Different Devices.
- KRM LOTO SAFETY PADLOCK ----"seamless" lock structure durability-Key system: DIFFER KEY, ALIKE KEY, MASTER & DIFFER KEY. The new management key technology,- 10 level management.
- To meet OSHA standard for The Control of Hazardous Energy (Lockout/Tagout), Title 29 Code of Federal Regulations(CFR)Part 1910.147
- With a curve at top to hold the lock with better grip
- Key Head in injection mold with same color of the lock.
- Key retaining-ensures that padlock is not left unlocked.
- Configuration key card, easy to know personal ID, indicating the corresponding padlock for easy management.
- Key system: **DIFFER KEY, ALIKE KEY, MASTER & DIFFER KEY.**
- **Body material:** Glass fiber reinforced nylon/(composition of ABS+NYLON)
- **Shackle Material:** Nylon Shackle
- **Color:** Red, Yellow, Blue, Green, Orange, White, Brown, Black, Purple
- Work temperature 0o - 250o F (-20o - 120o C)
- Also "DO NOT REMOVE", permanently engraved on the lock.
- **Weight – 80gm**

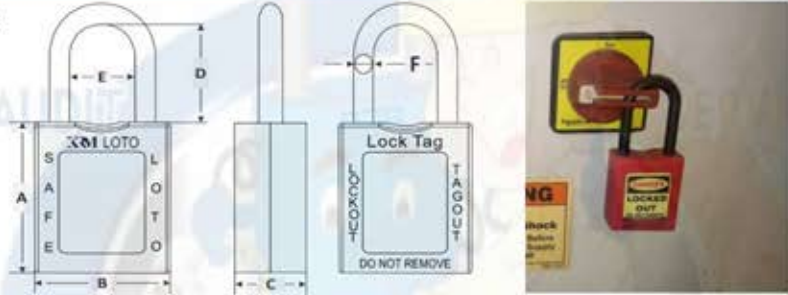

**KRM-K-OSLTP-C-NDK**



BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
45 mm	40 mm	20 mm	38 mm	20 mm	6 mm